

CC Series


Constant Current LED Driver

LED恒流驱动器

Features:

- Super thin design
- Wide Output Voltage range
- Constant current driver
- Independent compact design
- Input and output terminal blocks on the same side
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV equivalent
- Protection class II

- 超薄紧凑型设计
- 宽输出电压范围,适用更多的灯具
- 恒流驱动
- 超小体积, 独立式紧凑型设计
- 同侧输入和输出端接线端子
- 输出开路, 短路, 过载和超温保护
- 安装经济便捷
- 符合安全特低电压标准
- 保护等级 II

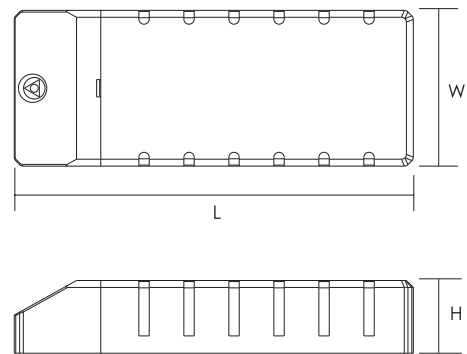

Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
CC35018	220-240	18	350	2-52	0.80C	87	<0.5	-20...+50	85	SELV	115x45x21	85
CC50018	220-240	18	500	2-38	0.80C	86	<0.5	-20...+50	85	SELV	115x45x21	85
CC65018	220-240	18	650	2-28	0.80C	84	<0.5	-20...+50	85	SELV	115x45x21	85
CC70018	220-240	18	700	2-26	0.80C	84	<0.5	-20...+50	85	SELV	115x45x21	85